


Technical Data Sheet

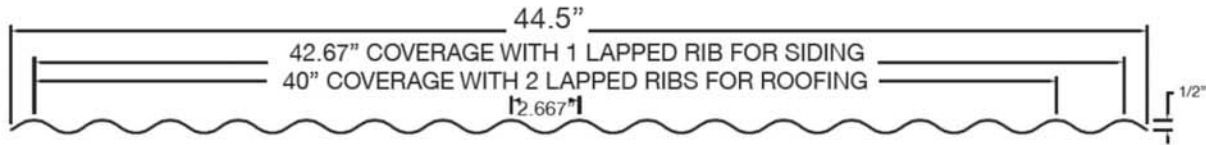

Panel Dimensions

Coverage Width	Siding: 37.33"	Roofing: 34.67"
Rib Pitch	2.67"	
Profile Depth	0.50"	
Thickness	0.040"	
Weight	0.62 lb/ft ²	

Material Specifications

3000 Series Alloy in compliance with the Aluminum Association Composition Specifications and conforming to ASTM B209 is standard.

Product Notes

- Remove the protective film quickly after installation.
- Panels should be laid flat in a dry, indoor environment during storage.
- Panels should always be lapped against prevailing winds
- Typical side lap spacing is 18". Consult a Professional Engineer for specific requirements, as this may not be appropriate for all applications.
- 1/8"x1/2" tape sealant shall be used at all side laps when used as a roof panel.
- When using this panel in a roofing application, it should be lapped two corrugations. Panels may be lapped one corrugation when used in a siding application.
- Minimum recommended roof slope: 2:12

General Information

Corrugated panels provided superior flexibility for use as a wall or roofing panel. The 7/8" panel has excellent negative load capability even for high-wind pressures. The Corrugated panels can be produced perforated for a variety of exterior projects, such as equipment screens. Perforated corrugated panels are also highly suitable for interior acoustical applications as well.

Testing

ASTM E283
ASTM E1592

ASTM E331
ASTM E1680

ASTM E1646



Alcoa Architectural Products
50 Industrial Boulevard
Eastman, GA 31023-4129
Tel. 800.841.7774
Fax. 478.374.7041
reynolux.com