


Installation Guidelines Face Fastened Solution

Expansion of the Reynobond® Panels must be allowed for:



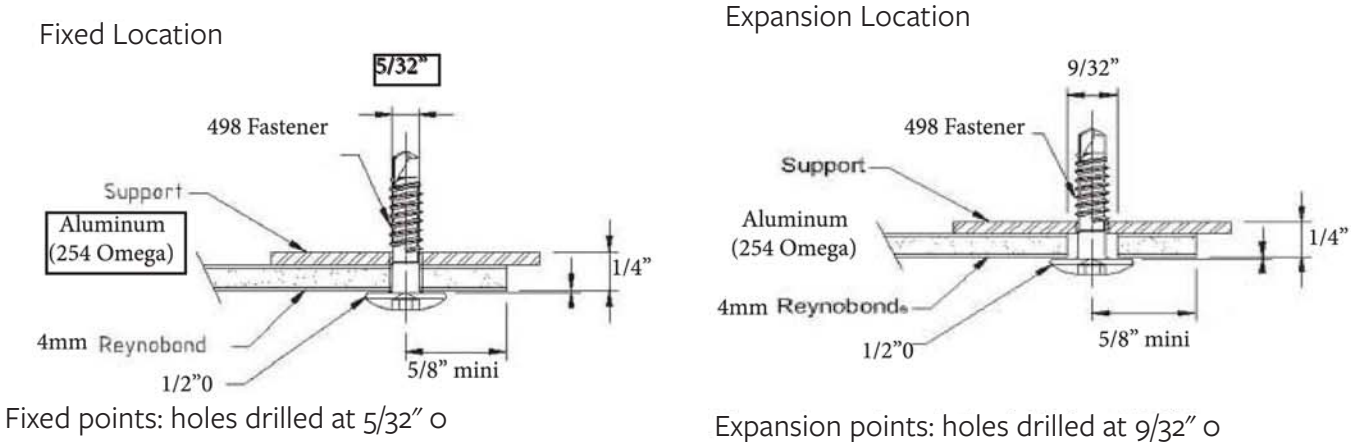

A. Expansion details:



Installation of panels:

A. Fix points:

Panels are predrilled prior to installation

1	Drill held horizontally	2	Screw until free rotation of the screw
 	 		

Peak torque: 1.7 #FT

Information contained herein or related hereto is intended only for evaluation by technically skilled persons, with any use thereof to be at their independent discretion and risk. Such information is believed to be reliable, but Arconic Architectural Products LLC (AAP) shall have no responsibility or liability for results obtained or damages resulting from such use. Arconic grants no license under, and shall have no responsibility or liability for infringement of, any patent or other proprietary right. Nothing in this document should be construed as a warranty or guarantee by AAP, and the only applicable warranties will be those set forth in AAP acknowledgement or in any printed warranty documents issued by AAP. The foregoing may be waived or modified only in writing by an AAP officer.

Disclaimer

Laws and building and safety codes governing the design and use of AAP's products, and specifically aluminum composite materials, vary widely. It is the responsibility of the owner, the architect, the general contractor, the installer and the fabricator/transformer, consistent with their roles, to determine the appropriate materials for a project in strict conformity to all applicable national, regional and local building codes and regulations. REYNOBOND IS COMBUSTIBLE; IT COULD CATCH FIRE AND BURN. SEE AAP WEBSITE FOR PRODUCT WARNINGS. ANY LABORATORY TESTING INFORMATION PROVIDED BY AAP APPLIES ONLY TO THE PARTICULAR PRODUCT OR ASSEMBLY TESTED AND DOES NOT NECESSARILY REPRESENT HOW PRODUCTS WILL ACTUALLY PERFORM IN USE.

This is a rainscreen system. Customer must use weather-barrier behind the system.

This system is intended only for Reynobond® 4mm, screwed to the 251 Omega aluminium profile.

Attachment of extrusion to wall system is the customer's responsibility.

Customer is also responsible for assembly of the wall system in accordance with applicable laws and building and safety codes.

B. Tools necessary for installation:



Centering tool 3/16" (PN 11670)

Electric drill



T20W Torx bit (PN 11671)

5/32" Bit
9/32" Bit



Suction pad tool



C. System components:

254 Omega profile



Fastener 498 (ss or xx Color)



1" x 1" x 1/8" Aluminium angle (is corner brace)








Disclaimer




Laws and building and safety codes governing the design and use of AAP's products, and specifically aluminum composite materials, vary widely. It is the responsibility of the owner, the architect, the general contractor, the installer and the fabricator/transformer, consistent with their roles, to determine the appropriate materials for a project in strict conformity to all applicable national, regional and local building codes and regulations. REYNOBOND IS COMBUSTIBLE; IT COULD CATCH FIRE AND BURN. SEE AAP WEBSITE FOR PRODUCT WARNINGS. ANY LABORATORY TESTING INFORMATION PROVIDED BY AAP APPLIES ONLY TO THE PARTICULAR PRODUCT OR ASSEMBLY TESTED AND DOES NOT NECESSARILY REPRESENT HOW PRODUCTS WILL ACTUALLY PERFORM IN USE.

D. Expansions points:

Panels are predrilled prior to installation

1	Place centering tool into the expansion hole	2	Insert screw into centering tool
			



3	Drill held horizontally	4	Screw to initiate the drilling without going through the profile
 			

5	Remove the centering tool	6	Screw until free rotation of the screw
 			



Disclaimer




Laws and building and safety codes governing the design and use of AAP's products, and specifically aluminum composite materials, vary widely. It is the responsibility of the owner, the architect, the general contractor, the installer and the fabricator/transformer, consistent with their roles, to determine the appropriate materials for a project in strict conformity to all applicable national, regional and local building codes and regulations. REYNOBOND IS COMBUSTIBLE; IT COULD CATCH FIRE AND BURN. SEE AAP WEBSITE FOR PRODUCT WARNINGS. ANY LABORATORY TESTING INFORMATION PROVIDED BY AAP APPLIES ONLY TO THE PARTICULAR PRODUCT OR ASSEMBLY TESTED AND DOES NOT NECESSARILY REPRESENT HOW PRODUCTS WILL ACTUALLY PERFORM IN USE.

E. Removal:

1	Pull on the panel with the suction pad	2	Unscrew
			

TAKE CARE:

The centering tool is not held horizontally		No centering tool used at expansion points	
	Screw head does not lean properly on the panel		Screw not centered, no allowance for expansion

Use of another type of screw		No removal of the centering tool	
 	<p>Will Not conform to technical approval</p> <p>No expansion allowance</p>		Screw stripped, the screw does not hold

Disclaimer

Laws and building and safety codes governing the design and use of AAP's products, and specifically aluminum composite materials, vary widely. It is the responsibility of the owner, the architect, the general contractor, the installer and the fabricator/transformer, consistent with their roles, to determine the appropriate materials for a project in strict conformity to all applicable national, regional and local building codes and regulations. REYNOBOND IS COMBUSTIBLE; IT COULD CATCH FIRE AND BURN. SEE AAP WEBSITE FOR PRODUCT WARNINGS. ANY LABORATORY TESTING INFORMATION PROVIDED BY AAP APPLIES ONLY TO THE PARTICULAR PRODUCT OR ASSEMBLY TESTED AND DOES NOT NECESSARILY REPRESENT HOW PRODUCTS WILL ACTUALLY PERFORM IN USE.

